


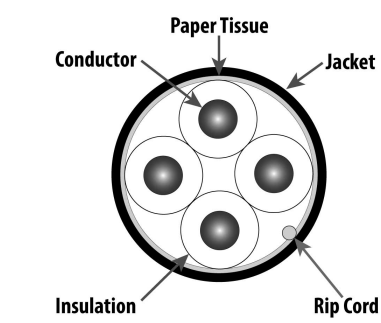

Product # V-1356

16/4 Indoor/Outdoor

16 gauge 4 conductor cable for alarm, audio, control, LED lighting, or other low voltage systems, featuring 26 strand bare copper conductors, quick-strip sleeve, and ripcord. UV rated for exposure to direct sunlight. Wet Location rated for exposure to water. Direct Burial rated for underground installation without conduit. Riser (CL3R) fire safety rating for installation in walls and risers (between floors) in both residential and commercial buildings. UL Listed.

<https://www.voltive.com/products/V-1356>

Standards & Ratings

Voltage Rating	300V
Temperature Rating	75°C
Materials & Construction	UL 13
Fire Rating	Riser (CL3R)
Flame Test	UL 1666
Testing Laboratory	UL
Wet Location?	Yes
Direct Burial?	Yes
Sunlight Resistant?	Yes
RoHS?	Yes

Insulation

Colors	Red, Black, White, Green
Material	Polyvinyl Chloride (PVC)
Average Thickness	0.30mm ± 0.08mm
Minimum Thickness	0.24mm
Outer Diameter	2.10mm ± 0.20mm
Resistance	≥ 50 megaohms/km
Dielectric Strength	500V AC for 1 minute

Conductors

Gauge	16AWG
Count	4
Material	Bare Copper
Outer Diameter	1.46mm
Strand Count	26
Strand Diameter	0.251mm
DC Resistance	≤ 13.70 ohms/km

Jacket

Available Colors	Black
Material	Polyvinyl Chloride (PVC)
Thickness	0.71mm ± 0.05mm
Minimum Thickness	0.53mm
Outer Diameter	6.67mm ± 0.30mm
Minimum Bend Radius	15 × diameter (100mm)
Paper Tissue?	Yes
Ripcord	Nylon (1000D)
Printing A	VOLTIVE V-1356 - XXX-XXX - MM/YY - VOLTIVE.COM - XXX FT USED / XXX FT LEFT
Printing B	16AWG 4C - E516774-XX (UL) CL3R - SUN RES - WET - DIR BUR - 75C - XXX FT USED / XXX FT LEFT

Part Numbers

Part #	Color	Length	Packaging	UPC	Weight	L x W x H (in)	Link
V-1356-1	Black	500ft	Box	810095242861	25.8 lbs	13.9 x 10.2 x 13.5	View